


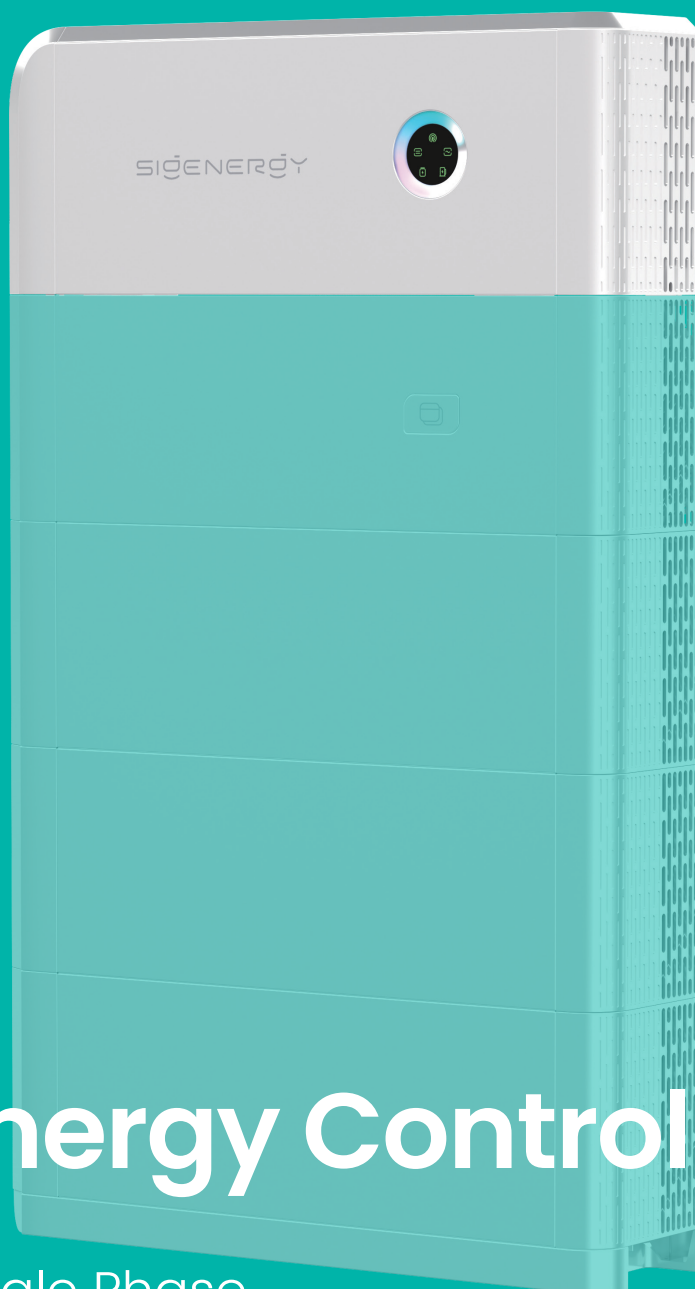

Sigen Energy Controller

5.0 – 12.0kW Single Phase

- EMS inside for precise control
- Up to 4 MPP. trackers
- Multi-source black start
- On & off-grid compatibility
- DC/AC ratio up to 2.0
- IP66 system protection rating

Sigen Energy Controller 5.0-12.0 kW Single Phase Australia

SigenStor EC	5.0 SP	6.0 SP	8.0 SP	10.0 SP	12.0 SP	Units
DC Input (from PV)						
Max. PV power	10000	12000	16000	20000	24000	W
Max. DC input voltage			600			V
Nominal DC input voltage			350			V
Start-up voltage			100			V
MPPT voltage range			50 ~ 550			V
Number of MPP. trackers	2	2	3	4	4	
Number of PV strings per MPPT			1			
Max. input current per MPPT			16			A
Max. short-circuit current per MPPT			20			A
AC Output (on-grid)						
Nominal output power	4999	6000	8000	9999	12000	W
Max. output apparent power	4999	6600	8800	9999	12000	VA
Nominal output current	21.7	27.3	36.4	43.4	54.6	A
Max. output current	21.7	30.0	40.0	43.4	54.6	A
Nominal output voltage	220 / 230 / 240			220 / 230		V
Nominal grid frequency			50 / 60			Hz
Power factor			0.8 leading ~ 0.8 lagging			
Total current harmonic distortion			THDi < 2%			
Efficiency						
Max. efficiency	98.0%	98.0%	97.6%	97.6%	97.6%	
European efficiency	97.4%	97.4%	97.0%	97.0%	97.0%	
AC Output (backup)						
Nominal output power	5000	6000	8000	10000	12000	W
Max. output apparent power	5500	6600	8800	11000	13200	W
Peak output power (10 seconds)	7500	9000	12000	15000	18000	W
Nominal output current	22.7	27.3	36.4	45.5	54.6	A
Max. output current	25.0	30.0	40.0	50.0	60.0	A
Peak output current (10 seconds)	34.1	40.9	54.6	68.2	81.8	A
Nominal output voltage	220 / 230 / 240			220 / 230		V
Nominal output frequency			50 / 60			Hz
Power factor			0.8 leading ~ 0.8 lagging			
Total voltage harmonic distortion			THDv < 2%			
Disruption time of backup switch ¹			0			ms
Battery Connection						
Battery module models	SigenStor BAT 5.0 / 8.0					
Number of modules per controller	1 ~ 6					pcs
Battery module voltage range	300 ~ 600					V
Protection						
Safety protection feature	DC reverse polarity protection, Insulation monitoring, Residual current monitoring, Arc fault circuit interrupter ² , AC overcurrent/overvoltage/short-circuit protection. Type II DC/AC surge protection, Anti-islanding protection					
General Data						
Dimensions (W / H / D)	700 / 300 / 245		700 / 300 / 260			mm
Weight	18		36			kg
Storage temperature range						°C
Operating temperature range						°C
Relative humidity range						
Max. operating altitude	4000					m
Cooling	Natural convection		Smart air cooling			
System ingress protection rating	IP66					
Communication	WLAN / Fast Ethernet / RS485 / Sigen CommMod (4G/3G/2G)					
Standard Compliance						
Standard ³	IEC/EN 62109-1, IEC/EN 62109-2, IEC/EN 62477, IEC/EN 61000-6-1, IEC/EN 61000-6-2, AS 4777					

1. This refers to the load-side disruption time, to achieve this functionality Sigen Energy Gateway needs to be used together with Sigen Energy Controller and Sigen Battery. Test conditions: In the open-circuit state of the power grid, the nominal power of the Sigen Energy Controller is higher than the total power of the home loads.
2. This is an optional feature only supported in certain models, please contact Sigenergy for more information.
3. For all standards refer to the certificates category on the Sigenergy website.